



REVISIONS			
DESCRIPTIONS	BY	DATE	APPROVED

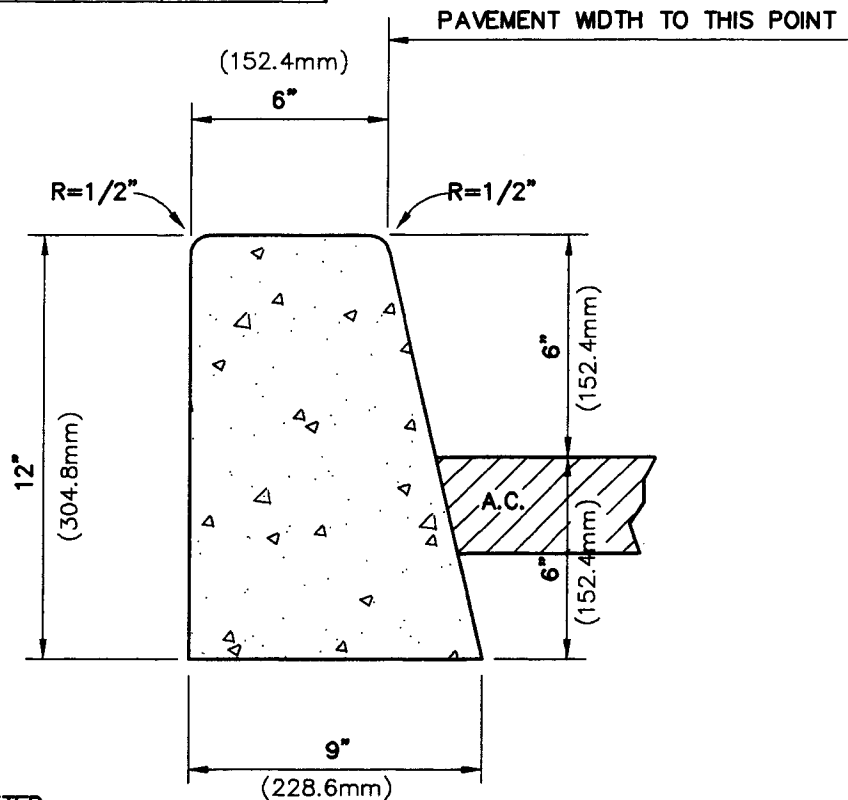

NOTES:

1. DOWELS MAY BE DELETED AND CURB UNREINFORCED WHEN EXTRUDED CONCRETE IS BONDED TO PAVEMENT SURFACE WITH APPROVED ADHESIVE.
2. FOR OTHER DETAILS AND SPECIFICATIONS REFER TO DRAWING NUMBERS AND SPECIFICATIONS IN THESE STANDARDS.

TYPE I

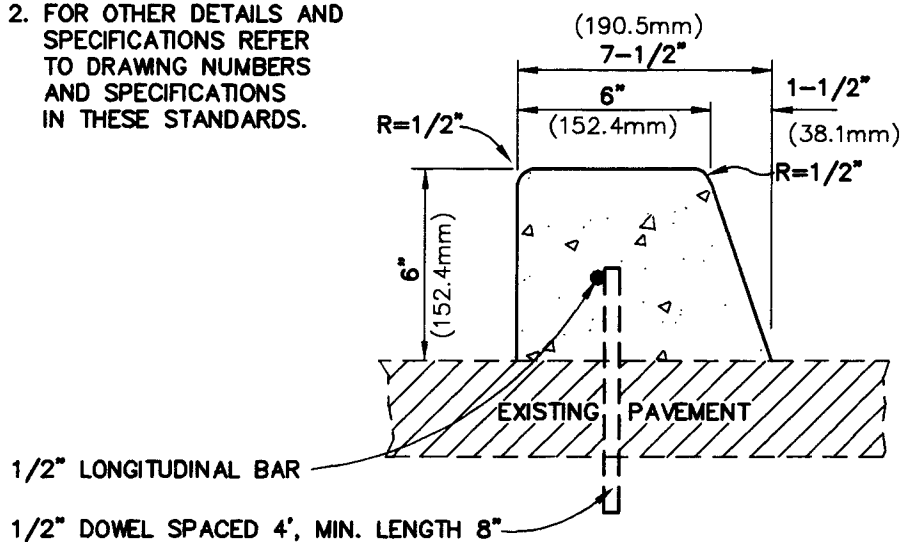

TYPE II

DRAWN BY:
C.A.C.
DESIGNED BY:

DATE:
4/18/94
FILE NAME:
PR-B-2.DWG

CITY OF PASO ROBLES
ENGINEERING DIVISION

6" (152.4mm) CURB ONLY

DRAWING NO.

B-2